


Picture: pm3/val/fi.. In-line filter DN25

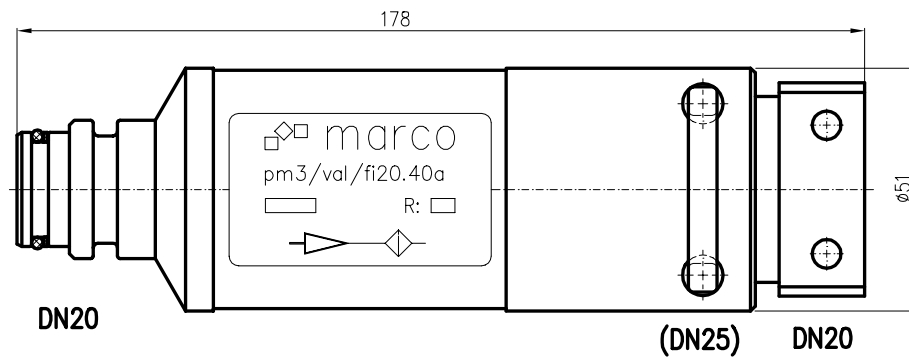

Picture: pm3/val/fi.. In-line filter DN20

The in-line filter is designed for pressure lines. It also prevents the in-line filter being put into use without a filter element, as in this case noticeable amounts of the medium leak out.

The filter is available in a range of versions which differ only in the DN connection and the size of the filter mesh.

Features

Connection	DN25	DN20
Dimensions (mm)	156 x 51	178 x 51
Filter mesh	40 micron	
Max. flow rate	500 l/min	
Operating pressure	350 bar	
Medium	please contact marco	
Housing	stainless steel	

Application

The in-line filter is typically used in hydraulic systems in the field of mining.

Order Number	Release	Description
pm3/val/fi25.40a	1.0	In-line filter DN25
pm3/val/fi20.40a	1.0	In-line filter DN20