


**Single pilot operated check valve, flange version  
 for one cylinder side**



This pilot operated check valve with flange is screwed directly onto the hydraulic cylinder. The hydraulic block and cylinder connections are DN12. The control and yield valve connections are DN10. The valve can be mounted either on the right or left hand side.

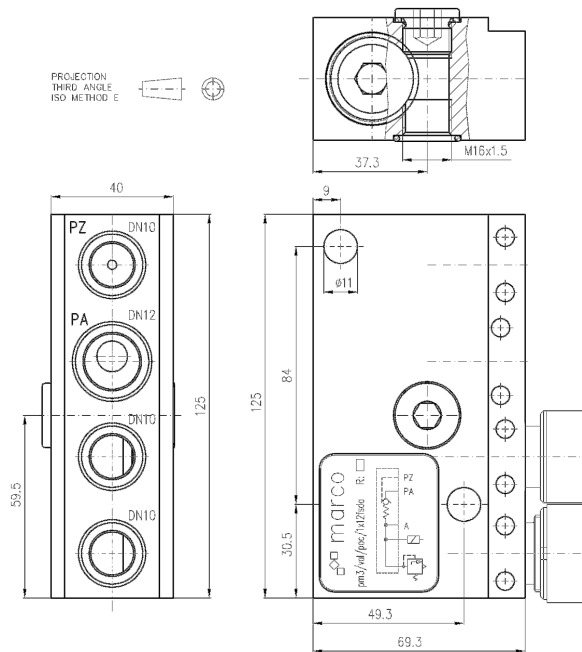

pm3/val/poc/1x12fsda

\* For information about yield valves, please see doc:D/pm3/val/y/002w.

Order number	Description
pm3/val/poc/1x12fsda	Single pilot operated check valve with flange for one cylinder side
pm3/val/y/.	Yield valve *