



Single pilot operated check valve DN20

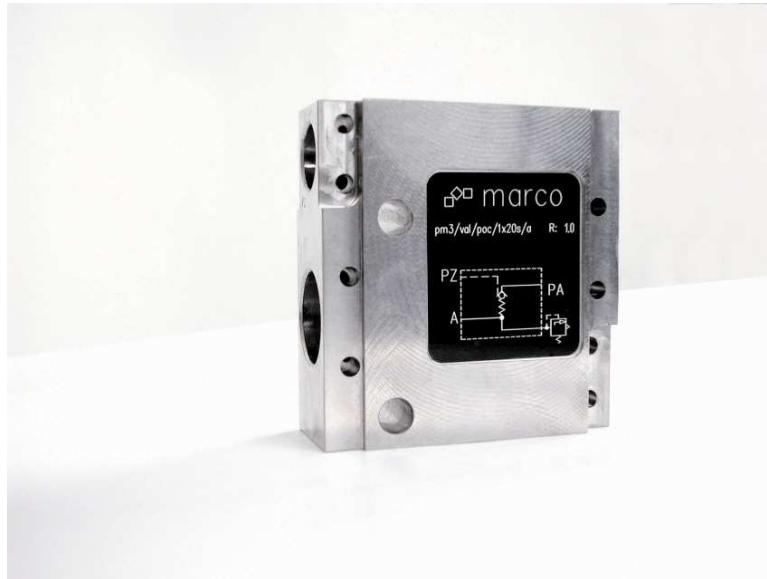

This single pilot operated check valve has a DN20 connection to the hydraulic block and cylinders and the control and yield valve connections in DN10. The valve allows no return flow when there is pressure at PA and none at PZ. The yield valve shown here is not part of the delivery package.

This valve is used to prevent the conveyor being pulled back either by the mining machine or by the adjacent shields being drawn. If the advancing cylinders jar too heavily when switched on, then a damping valve can be fitted in the connection for the ram cylinder.

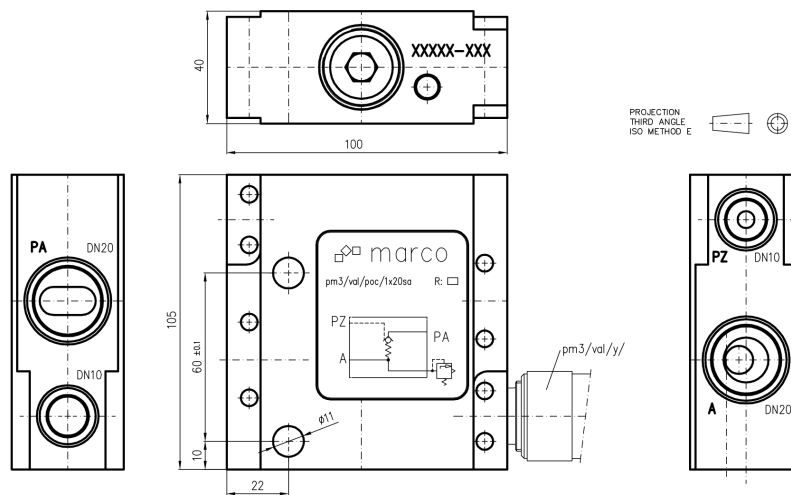

pm3/val/poc/1x20sa

(This valve is also produced with all connections in DN10 and DN12).

* For information about booster yield valves, please refer to doc:D/pm3/val/y/002w.

Order number	Description
pm3/val/poc/1x20sa	Single pilot operated check valve DN20
pm3/val/y/.	Yield valve*