


Dual pilot operated check valve, flat design



This dual pilot operated check valve closes off one side of a cylinder operating in parallel using two independent check valves which are activated together. A typical application is for an articulated canopy tip where it provides double protection. The flow rate of the valve is large enough for DN15. The same valve is available in different housings with a range of hose connections.

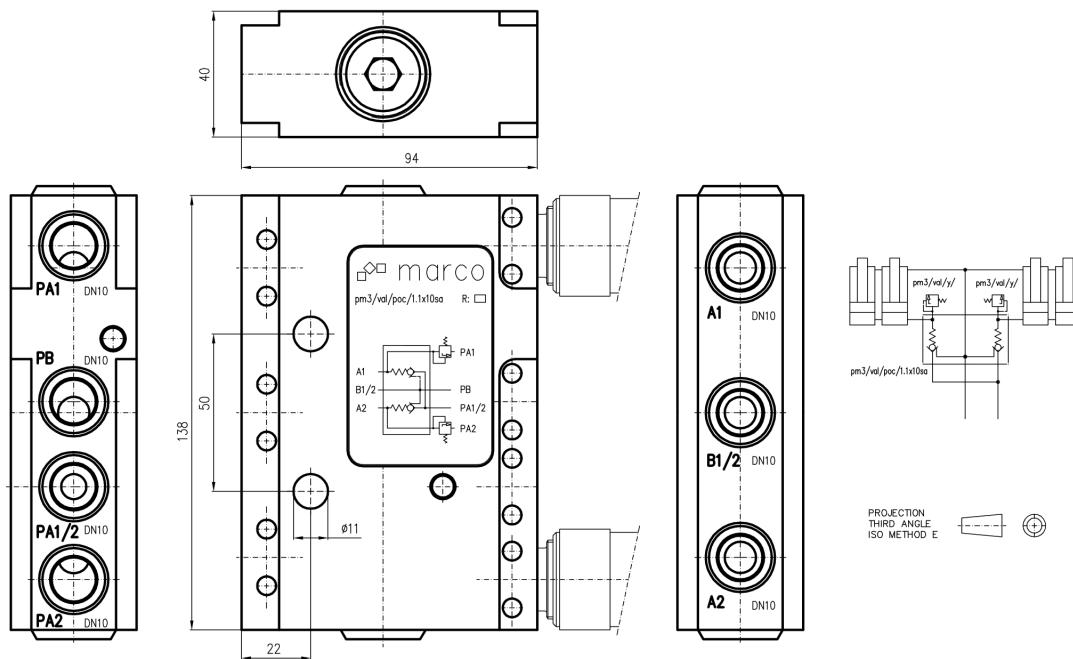

pm3/val/poc/1.1x10sa

Application

It is designed for functions which have to be securely shut off, for instance in articulated canopy tips.

Order number	Description
pm3/val/poc/1.1x10sa	Dual pilot operated check valve DN10, flat design
pm3/val/poc/1.1x12sa	Dual pilot operated check valve DN12, cube design